



Albany Steel & Brass Corporation

**Distributors of Fasteners and
Industrial / Construction Supplies Since 1918**

1900 W. GRAND AVE. CHICAGO, IL 60622
PHONE: 312-733-1900 FAX: 312-733-9887



www.sales@albanysteel.com

ISO 9001-2008 www.albanysteel.com


ROCK-ON™

Cement Board Fasteners

High performance rib design is still the best!!!

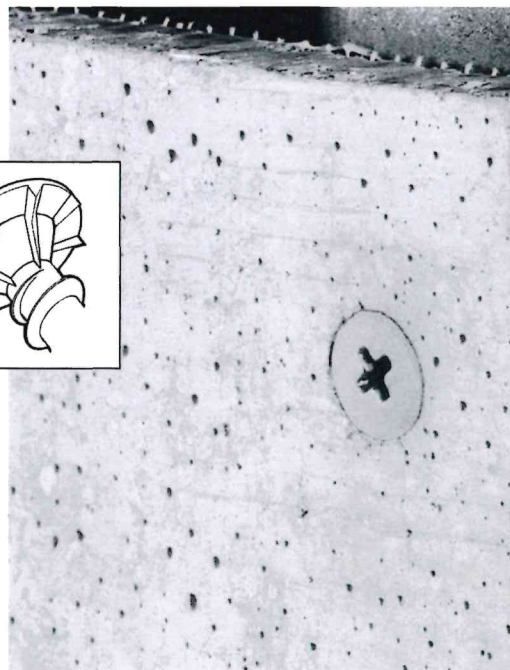


Applications



Cement-type boards or any
dense sheathings to steel or
wood studs.



Wire lath to steel or
wood studs.



Plywood to steel or
wood studs.

Product Features

-  Rib design under head countersinks into dense material while preventing stripouts.
-  Two point types for steel and wood applications.
-  Larger head diameter increases board surface contact for greater pullover resistance.
-  Rock-On™ is recommended for ACQ treated wood.

Product Specifications

Diameter.....#8; #9

Thread Form.....8-18; 9-15 Hi-Lo®

Drill Point.....#8 Type S-12®; #9 Type "S"


Head Style.....Wafer Head with countersinking ribs

Finish.....Climacoat®

CEMENT BOARD APPLICATIONS

CEMENT BOARD FASTENERS

Selector Guide



Part Number	Length	Material Attachment Range	Box Qty	Applications
Hi-Lo® Rock-On				• Cement Board to wood or light gauge steel 26-20 gauge
2151500*	9 x 1-1/4"	Up to 3/4" Material Thickness to Wood; 3/8" - 1" Material Thickness to Steel	5,000	
2153500*	9 x 1-5/8"	Up to 1-1/8" Material Thickness to Wood; 3/8" - 1-3/8" Material Thickness to Steel	4,000	
S-12® Rock-On				• Cement Board to Steel Studs 20-12 Gauge
2156500*	8 x 1-1/4"	3/8" to 3/4" Material Thickness	5,000	
2159500*	8 x 1-5/8"	3/8" to 1-1/4" Material Thickness	4,000	

*Fully Threaded

Performance Data

PULLOUT VALUES IN STEEL (GAUGES)								
Gauge No.	26	24	22	20	18	16	14	12
S-12	120	191	239	285	470	663	910	1424
Hi-Lo	163	242	314	370	-	-	-	-

WOOD (EMBEDMENT) #2 SPF 2 x 4				
	1/2"	3/4"	1"	1-1/4"
Hi-Lo	223	312	555	676

SHEET STEEL GAUGES								
Gauge No.	26	24	22	20	18	16	14	12
Decimal Equivalent	.018"	.024"	.030"	.036"	.048"	.060"	.075"	.105"

The values listed are ultimate averages achieved under laboratory conditions and apply to Buildex manufactured fasteners only. Appropriate safety factors should be applied to these values for design purposes.

Installation Guidelines

- A standard screwgun with a depth sensitive nosepiece should be used to install cement board fasteners. For optimal fastener performance, the screwgun should be a minimum of 6 amps and have an RPM range of 0-2500.
- Adjust the screwgun nosepiece to properly seat the fastener.
- Worn or damaged bit tips should be replaced.
- The fastener is fully seated when the head is flush with the work surface.
- Overdriving may result in torsional failure of the fastener or stripout of the substrate.
- The fastener must penetrate beyond the metal structure a minimum of 3 pitches of thread.

Albany Steel & Brass Corporation
Distributors of Fasteners and
Industrial / Construction Supplies Since 1918
1900 W. GRAND AVE. CHICAGO, IL 60622
PHONE: 312-733-1900 FAX: 312-733-9887
www.sales@albanysteel.com
ISO 9001-2008 www.albanysteel.com

E-Z Ancor®, E-Z Stud Solver™, E-Z Lite™, E-Z Mini™, E-Z Plastic Plus™, Twist-N-Lock™, and E-Z Toggle™ are trademarks of Illinois Tool Works, Inc.